

cor light ...

LS34Q satiné ... modular

Street lighting unit


Optimized for the ME3 to ME6- classes of street lighting in accordance with EN 13201

- Typical ratio of 4.25 for pole distance to mounting height




- Numerous options for attaching and configuring
- Power rating up to 600 mA, dimmable
- Highest system efficiency
- Sustainable and future-oriented
- Multichip technology
- ESD-protection
- CRI 70 min

Unit structure




* Specific article number

A Lens optic

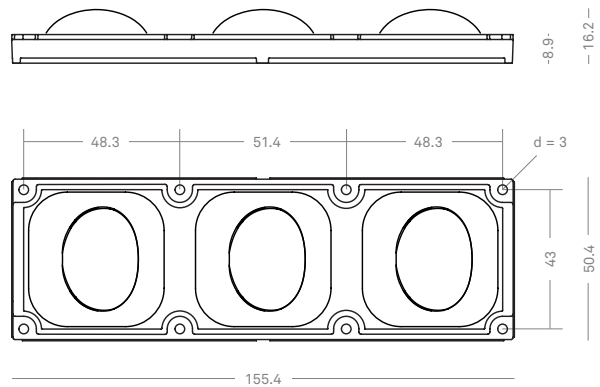

Light distribution

Polar diagram

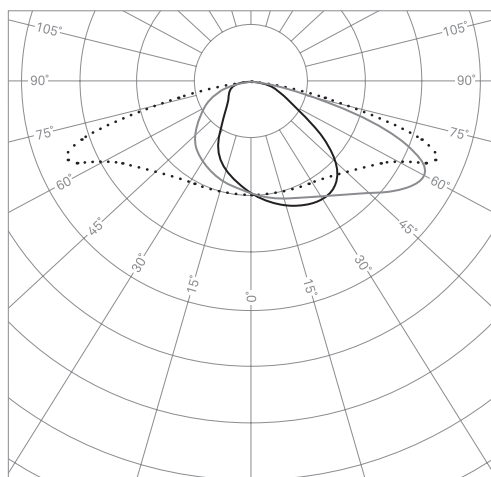



... C0-C180

— C30-C210

— C90-C270


● Mounting height

Illuminance distribution

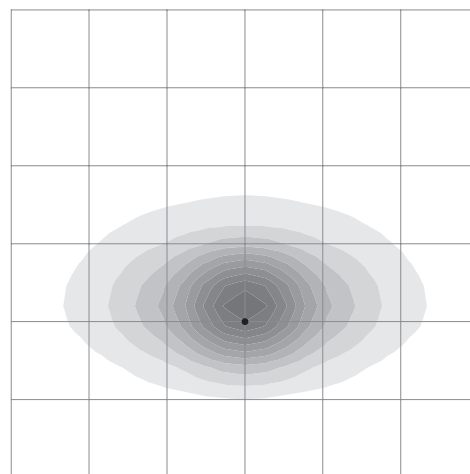

C0

C180




C270

C90


Variants

V_F 35 V

→ Article no. **see table below + variant**



Variant **04** (power outlet underneath): IP67 rating in combination with mounting profile



Variant **03** (power outlet on side): IP67 rating

Article no.	Colour temperature (K) (typical)	No. of LED	Power (W)				Lumen (lm) (25°C ambient temperature including optical system loss)				Luminous efficacy of LED module (lm/W); (25°C ambient temperature including optical system loss)				Life time (h)
			300 mA	400 mA	500 mA	600 mA	300 mA	400 mA	500 mA	600 mA	300 mA	400 mA	500 mA	600 mA	
1 15 0001 ___	3000	3	9,9	13,2	16,5	19,8	1348	1710	2039	2336	136,2	129,4	123,3	117,7	50000
1 15 0002 ___	4000	3	9,9	13,2	16,5	19,8	1440	1832	2182	2502	145,5	138,6	132,0	126,1	50000
1 15 0003 ___	5700	3	9,9	13,2	16,5	19,8	1440	1832	2182	2502	145,5	138,6	132,0	126,1	50000

→ Article no. **example**
Lighting unit with power outlet underneath: **1 15 0001 04**

Note: the product code is complete only if the variant is indicated.

Prerequisite for compliance of the data sheet specifications is the observation of temperature limits
T_c < 80°C @ 600mA and 25°C ambient temperature
Temperature measuring unit available





B Mounting profile (optional)

- Can be used for lighting units of variant 03 and 04

3 mounting profile

→ Article no. **40 2000 010**

Recommended mounting screws included: BN 20165 – M 2.5 × 12 mm

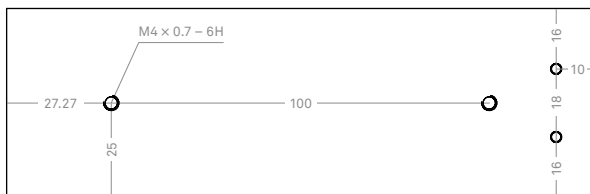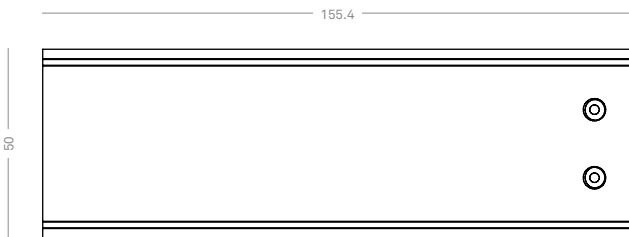

Assembly and maintenance instruction on www.corlight.com